




Tipsko rešenje klima komore

3.5.2.2.

Klima komora za uštedu energije sa grubim filterima, odsisnim ventilatorom, mešnom sekcijom, rotacionim regeneratorskom toplote, toplovodnim grejačem, hladnjakom i potisnim ventilatorom

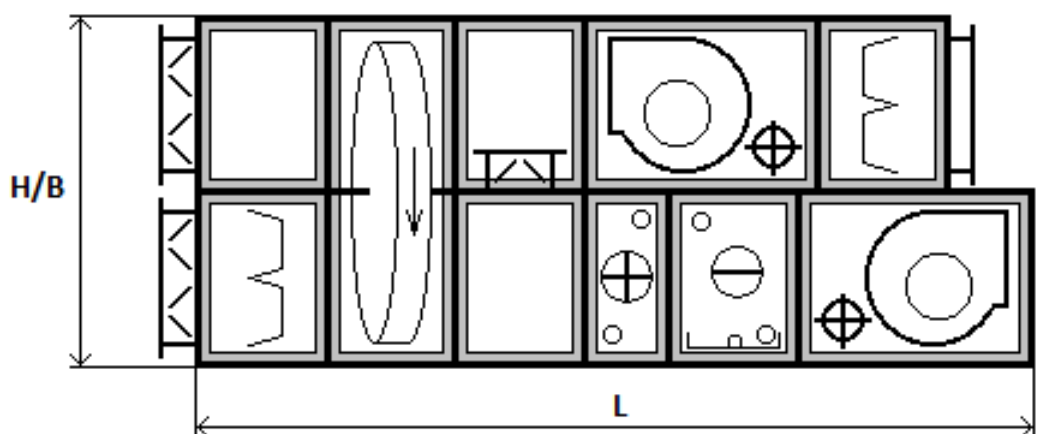

UP+FB+VO+M1+RO+P6+DR
DR+FB+RO+M1+GB+HV+VU

Naša oznaka

Vel. kl.k.	Vmin [m³/h]	Vmax [m³/h]	Vel. vent.	Pmu [kW]	Pmo [kW]	Qg [kW]	Qh [kW]	Qro [kW]	B [mm]	H [mm]	L [mm]	G [kg]
2	800	1200	160	1,1	0,55	10	7	9	740	860	2910	454
3	1200	1800	200	1,1	0,75	15	11	12	740	1170	3220	503
4	1700	2400	250	1,5	1,1	20	14	17	740	1480	3530	633
6	2800	4000	280	2,2	1,5	30	24	32	1050	1480	3530	834
9	4800	6700	355	4	2,2	48	40	55	1050	2100	4150	1132
12	6600	9300	400	5,5	3	71	55	71	1360	2100	4150	1387
16	8700	12100	450	7,5	4	92	72	94	1360	2720	4460	1840
20	11100	15600	560	11	5,5	119	93	120	1670	2720	4770	2270
25	14400	20200	630	11	7,5	151	120	160	1670	3340	5080	2949
30	17500	24500	710	15	7,5	184	146	192	1980	3340	5080	3365
36	20900	29300	800	15	11	214	174	236	1980	3960	5700	4275
48	28600	40100	900	22	15	293	238	324	2600	3960	5700	5230
64	38700	54200	1000	30	18,5	396	322	437	2600	5200	6320	7120
80	49000	68600	1000	37	22	442	407	624	3220	5200	6320	8406