



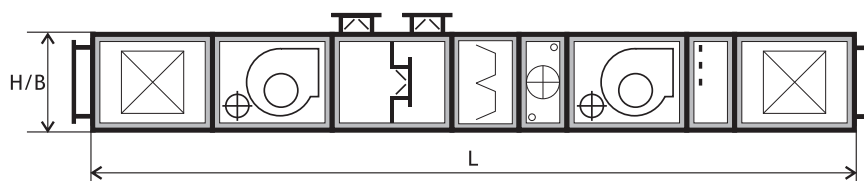

Tipsko rešenje klima komore

3.1.2. Klima komora za ubacivanje i izvlačenje vazduha sa prigušivačima buke, odsisnim ventilatorom, mešnom sekcijom sa tri regulaciona dempera, grubim filterom, toplovodnim grejačem i potisnim ventilatorom

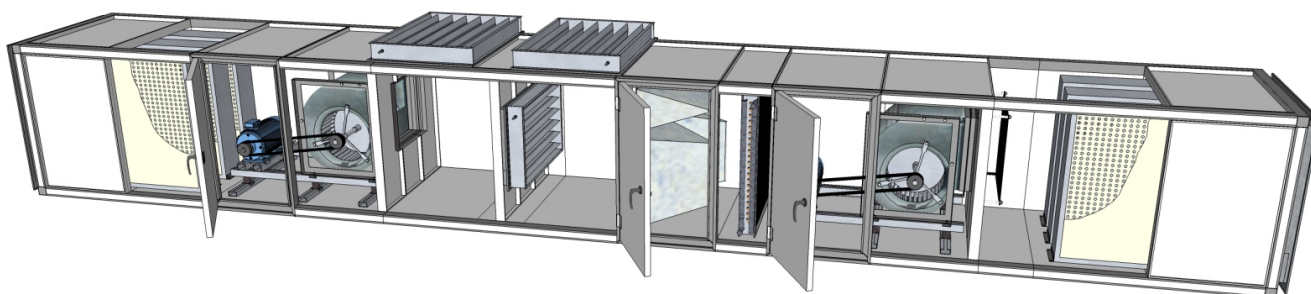

UP+PO+VO+M3+FB+GB+VU+DI+PU+IP

Naša oznaka

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1500	160	0,75	0,55	21	740	430	5080	475
3	1200	2200	200	0,75	0,75	31	740	585	6010	578
4	1700	3000	250	1,1	1,1	42	740	740	6630	718
6	2800	5000	280	1,5	1,5	70	1050	740	6630	894
9	4800	8400	355	3	2,2	118	1050	1050	7870	1221
12	6600	11700	400	4	4	164	1360	1050	7870	1482
16	8700	15200	450	5,5	5,5	213	1360	1360	8800	1891
20	11100	19500	560	7,5	5,5	274	1670	1360	9420	2352
25	14400	25300	630	7,5	7,5	355	1670	1670	10040	2976
30	17500	30700	710	11	7,5	430	1980	1670	10040	3425
36	20900	36600	800	11	11	514	1980	1980	11280	4235
48	28600	50100	900	15	15	703	2600	1980	11280	6196
64	38700	67700	1000	22	18,5	950	2600	2600	12830	6693
80	49000	85000	1000	30	30	1300	3220	2600	12830	8140