



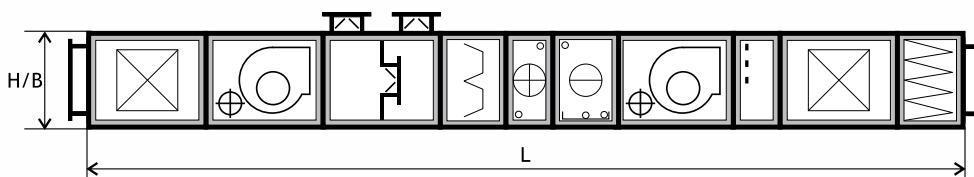

Tipsko rešenje klima komore

3.1.6. Klima komora za ubacivanje i izvlačenje vazduha sa prigušivačima buke, odsisnim ventilatorom, mešnom sekcijom sa tri regulaciona dempera, grubim filterom, toplovodnim grejačem, hladnjakom, potisnim ventilatorom i finim filterom.

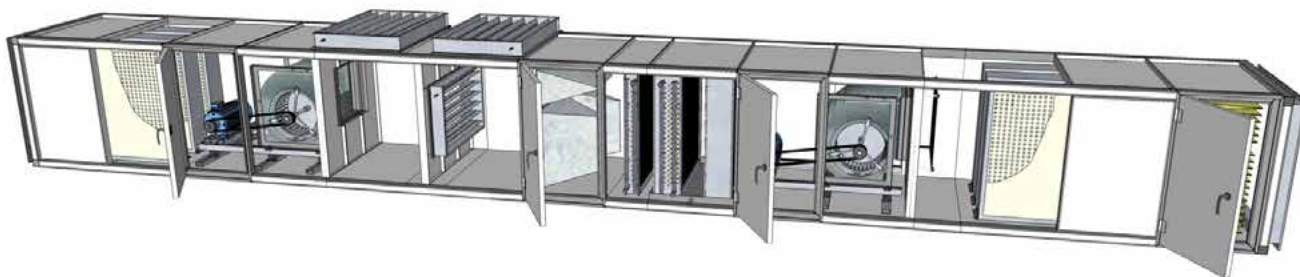

UP+PO+VO+M3+FB+GB+HV+VU+DI+PU+FC+IP

Naša oznaka

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1500	160	0,75	0,55	21	7	740	430	6010	581
3	1200	2200	200	0,75	0,75	31	11	740	585	7250	700
4	1700	3000	250	1,1	1,1	42	14	740	740	7870	855
6	2800	5000	280	1,5	1,5	70	24	1050	740	7870	1067
9	4800	8400	355	3	2,2	118	40	1050	1050	9110	1434
12	6600	11700	400	4	4	164	55	1360	1050	9110	1743
16	8700	15200	450	5,5	5,5	213	72	1360	1360	10040	2206
20	11100	19500	560	7,5	5,5	274	93	1670	1360	10660	2726
25	14400	25300	630	7,5	7,5	355	120	1670	1670	11280	3428
30	17500	30700	710	11	7,5	430	146	1980	1670	11280	3944
36	20900	36600	800	11	11	514	174	1980	1980	12520	4833
48	28600	50100	900	15	15	703	238	2600	1980	12520	6953
64	38700	67700	1000	22	18,5	950	322	2600	2600	14070	7625
80	49000	85000	1000	30	30	1300	407	3220	2600	14070	11218