




Tipsko rešenje klima komore

3.2.4.

Klima komora za ubacivanje i izvlačenje vazduha, spratna, sa prigušivačima buke, odsisnim ventilatorom, mešnom sekcijom sa tri regulaciona dempera, grubim filterom, toplovodnim grejačem, hladnjakom i potisnim ventilatorom

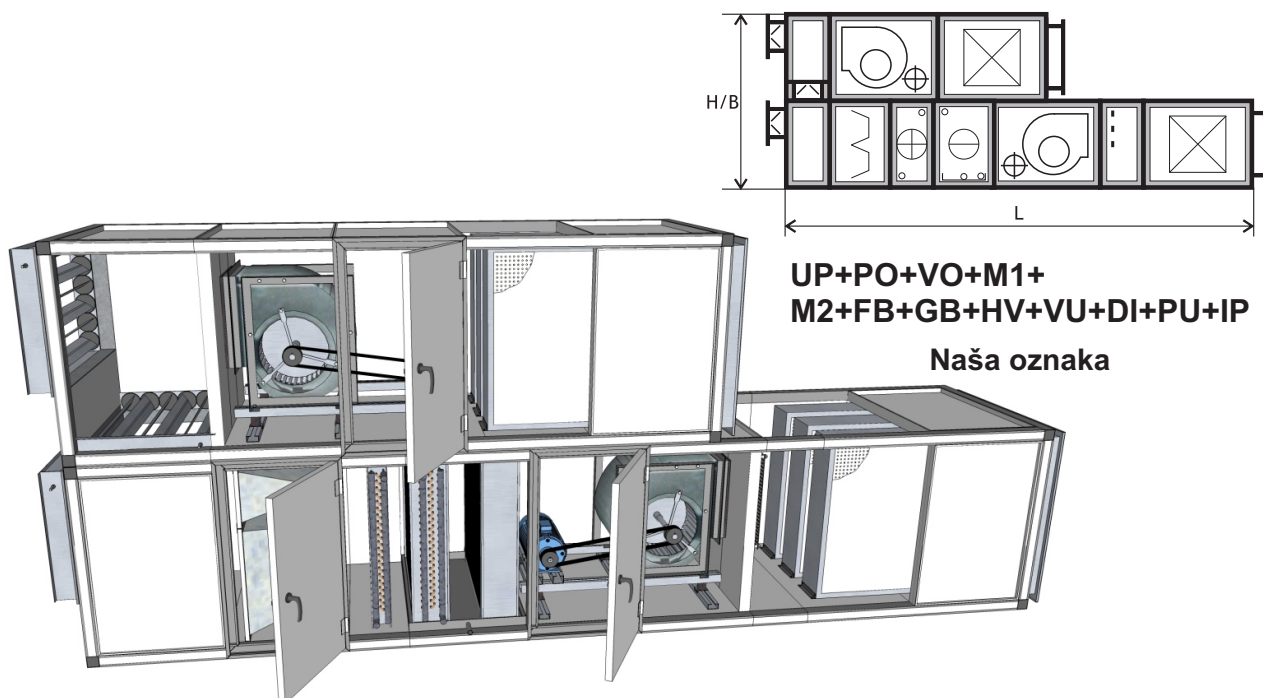

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,55	0,37	17	7	740	860	3530	564
3	1200	1800	200	0,75	0,55	25	11	740	1170	4150	677
4	1700	2400	250	1,1	0,55	34	14	740	1480	4460	828
6	2800	4000	280	1,5	1,1	56	24	1050	1480	4460	1040
9	4800	6700	355	3	1,5	94	40	1050	2100	5080	1404
12	6600	9300	400	4	2,2	130	55	1360	2100	5080	1712
16	8700	12100	450	5,5	3	170	72	1360	2720	5700	2179
20	11100	15600	560	5,5	4	219	93	1670	2720	6010	2694
25	14400	20200	630	7,5	5,5	283	120	1670	3340	6320	3397
30	17500	24500	710	11	5,5	344	146	1980	3340	6320	3916
36	20900	29300	800	11	7,5	411	174	1980	3960	6940	4808
48	28600	40100	900	15	11	563	238	2600	3960	6940	5965
64	38700	54200	1000	18,5	11	760	322	2600	5200	7870	7655
80	49000	68600	1000	22	18,5	962	407	3220	5200	7870	9317