





Tipsko rešenje klima komore

3.2.5. Klima komora za ubacivanje i izvlačenje vazduha, spratna, sa odsisnim ventilatorom, mešnom sekcijom sa tri regulaciona dempera, grubim filterom, toplovodnim grejačem, hladnjakom, potisnim ventilatorom i finim filterom

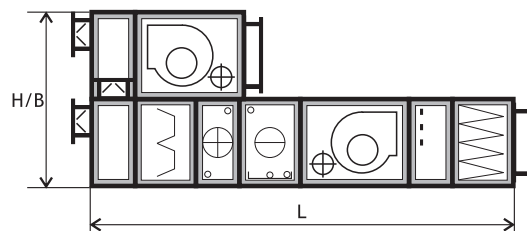

**UP+VO+M1+
M2+FB+GB+HV+VU+DI+FC+IP**

Naša oznaka

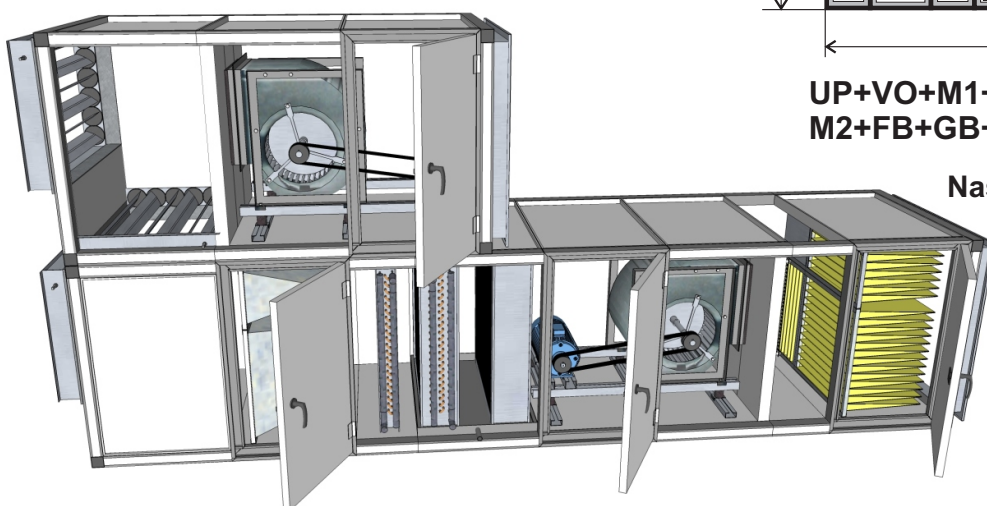

Vel. kl. k.	Vmin [m³/h]	Vmax [m³/h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,55	0,37	17	7	740	860	2910	434
3	1200	1800	200	0,75	0,55	25	11	740	1170	3530	491
4	1700	2400	250	1,1	0,55	34	14	740	1480	3840	617
6	2800	4000	280	1,5	1,1	56	24	1050	1480	3840	764
9	4800	6700	355	3	1,5	94	40	1050	2100	4460	1054
12	6600	9300	400	4	2,2	130	55	1360	2100	4460	1279
16	8700	12100	450	5,5	3	170	72	1360	2720	5080	1655
20	11100	15600	560	5,5	4	219	93	1670	2720	5390	2064
25	14400	20200	630	7,5	5,5	283	120	1670	3340	5700	2613
30	17500	24500	710	11	5,5	344	146	1980	3340	5700	3003
36	20900	29300	800	11	7,5	411	174	1980	3960	6320	3760
48	28600	40100	900	15	11	563	238	2600	3960	6320	4625
64	38700	54200	1000	18,5	11	760	322	2600	5200	7250	5996
80	49000	68600	1000	22	18,5	962	407	3220	5200	7250	7289