



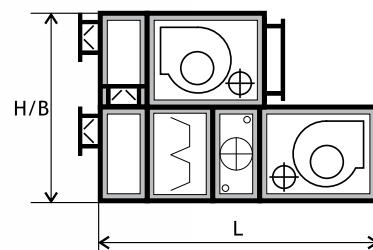

Tipsko rešenje klima komore

3.2.1. Klima komora za ubacivanje i izvlačenje vazduha, spratna, sa odsisnim ventilatorom, mešnom sekcijom sa tri regulaciona dempera, grubim filterom, toplovodnim grejačem i potisnim ventilatorom

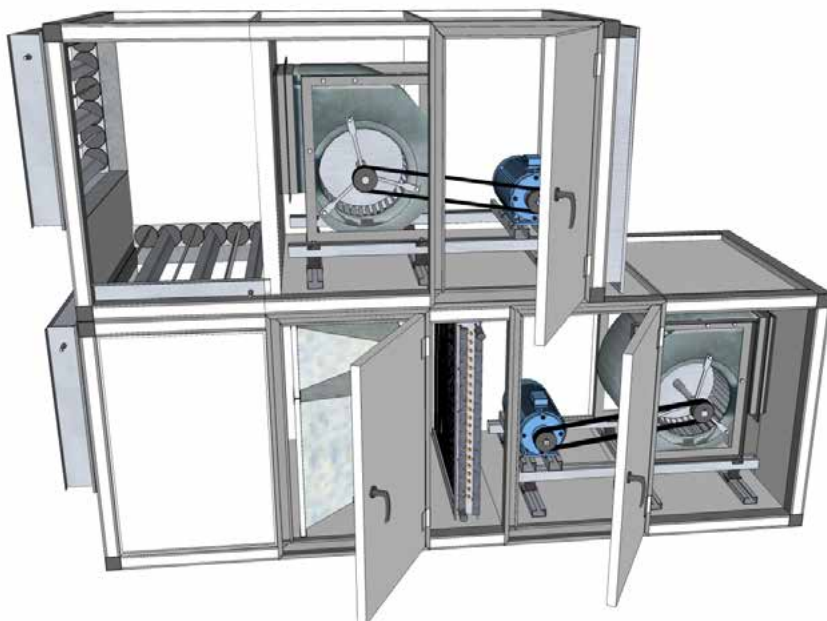

**UP+VO+M1+
M2+FB+GB+VU**

Naša oznaka

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1500	160	0,75	0,55	21	740	860	1670	307
3	1200	2200	200	0,75	0,75	31	740	1170	1980	345
4	1700	3000	250	1,1	1,1	42	740	1480	2290	453
6	2800	5000	280	1,5	1,5	70	1050	1480	2290	560
9	4800	8400	355	3	2,2	118	1050	2100	2910	803
12	6600	11700	400	4	4	164	1360	2100	2910	975
16	8700	15200	450	5,5	5,5	213	1360	2720	3220	1259
20	11100	19500	560	7,5	5,5	274	1670	2720	3530	1599
25	14400	25300	630	7,5	7,5	355	1670	3340	3840	2058
30	17500	30700	710	11	7,5	430	1980	3340	3840	2372
36	20900	36600	800	11	11	514	1980	3960	4460	3040
48	28600	50100	900	15	15	703	2600	3960	4460	3730
64	38700	67700	1000	22	18,5	950	2600	5200	5080	4836
80	49000	85000	1000	30	30	1300	3220	5200	5080	5908