




Tipsko rešenje klima komore

3.3.1.3.

Klima komora za uštedu energije sa grubim filterima, pločastim rekuperatorom toplote tipa vazduh-vazduh, odsisnim ventilatorom, toplovodnim grejačem, hladnjakom i potisnim ventilatorom

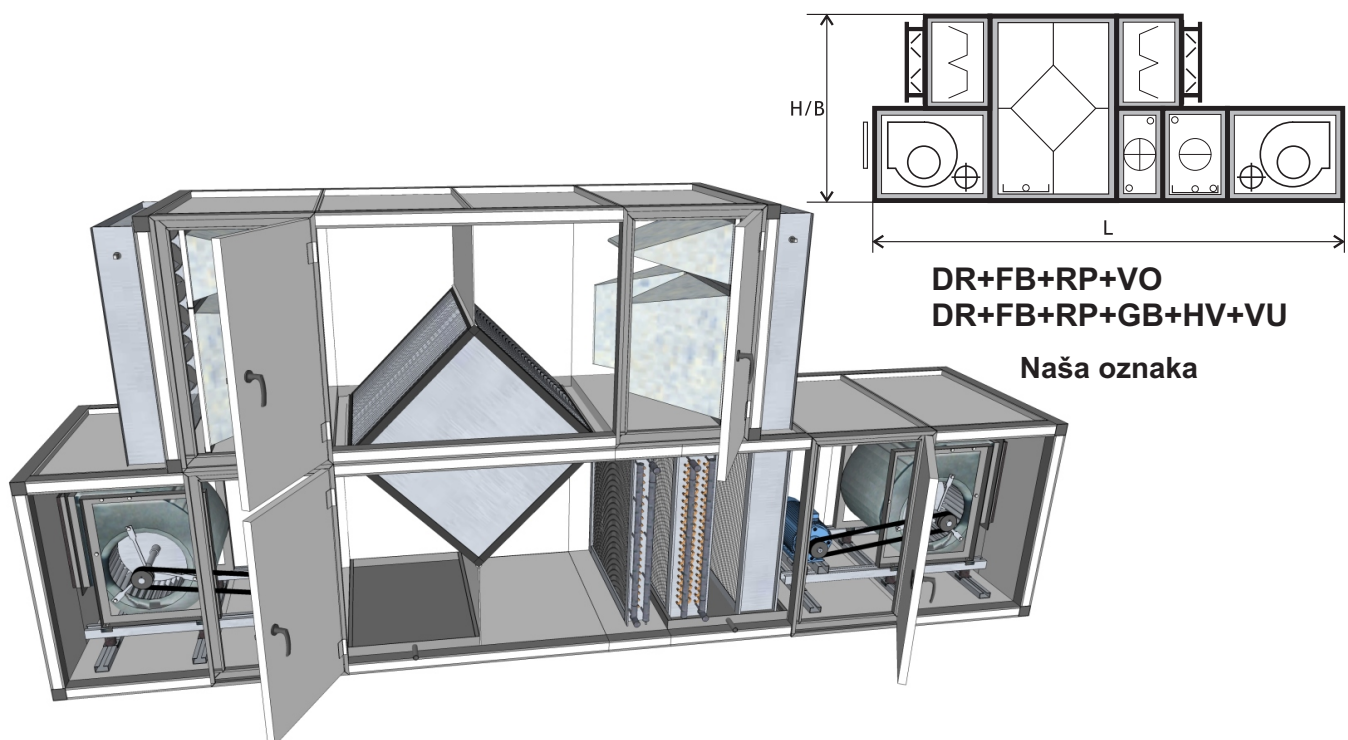

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	Qrp [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,75	0,55	10	7	7	740	860	2910	416
3	1200	1800	200	1,1	0,75	15	11	10	740	1170	2910	483
4	1700	2400	250	1,5	1,1	20	14	14	740	1480	3530	614
6	2800	4000	280	2,2	1,5	30	24	26	1050	1480	3840	818
9	4800	6700	355	3	2,2	48	40	46	1050	2100	4460	1070
12	6600	9300	400	4	3	71	55	59	1360	2100	4460	1330
16	8700	12100	450	5,5	4	92	72	78	1360	2720	5390	1792
20	11100	15600	560	7,5	5,5	119	93	100	1670	2720	5390	2143
25	14400	20200	630	11	7,5	151	120	132	1670	3340	6320	2844
30	17500	24500	710	11	7,5	184	146	160	1980	3340	6320	3273
36	20900	29300	800	15	11	214	174	197	1980	3960	7250	4110
48	28600	40100	900	18,5	15	293	238	270	2600	3960	7250	5040
64	38700	54200	1000	22	18,5	396	322	364	2600	5200	8490	6763
80	49000	68600	1000	30	22	442	407	520	3220	5200	8490	9040