





Tipsko rešenje klima komore

3.4.4. Klima komora za uštedu energije sa prigušivačima buke, grubim filterima, odsisnim ventilatorom, rekuperatorom toplote tipa vazduh-voda/glikol, toplovodnim grejačem, hladnjakom i potisnim ventilatorom

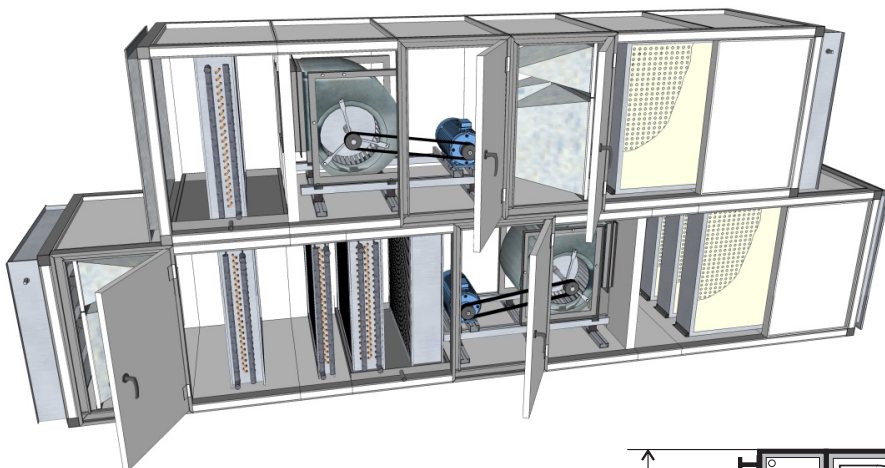

**DR+PO+FB+VO+RH+IP+
 DR+FB+RG+GB+HV+VU+DI+PU+IP**

Naša oznaka

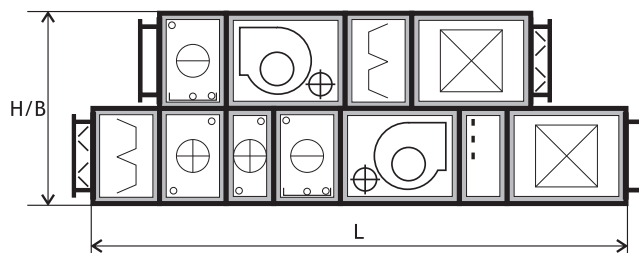

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	Qrg [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,75	0,55	13	7	4	740	860	3530	682
3	1200	1800	200	1,1	0,75	18	11	7	740	1170	4150	817
4	1700	2400	250	1,5	1,1	24	14	10	740	1480	4460	989
6	2800	4000	280	2,2	1,5	39	24	17	1050	1480	4460	1248
9	4800	6700	355	3	2,2	66	40	28	1050	2100	4770	1616
12	6600	9300	400	4	3	90	55	40	1360	2100	4770	1991
16	8700	12100	450	5,5	4	119	72	51	1360	2720	5390	2543
20	11100	15600	560	7,5	5,5	152	93	67	1670	2720	5390	3052
25	14400	20200	630	11	7,5	197	120	86	1670	3340	5700	3867
30	17500	24500	710	11	7,5	241	146	103	1980	3340	5700	4481
36	20900	29300	800	15	11	290	174	121	1980	3960	6010	5408
48	28600	40100	900	18,5	15	395	238	168	2600	3960	6010	6761
64	38700	54200	1000	22	18,5	546	322	214	2600	5200	6630	8564
80	49000	68600	1000	30	22	668	407	294	3220	5200	6630	10505