




Tipsko rešenje klima komore

1.2.8.

Klima komora za grejanje i ventilaciju sa mešnom sekcijom sa dva regulaciona dempera, grubim filterom, toplovodnim grejačem, potisnim ventilatorom i prigušivačem buke.

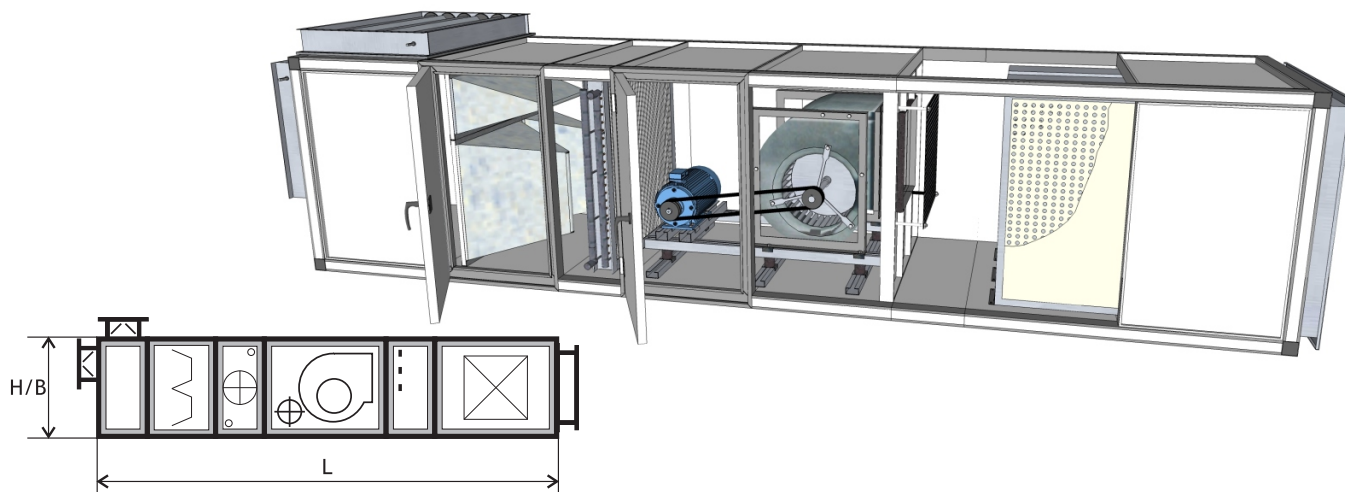

M2+FB+GB+VU+DI+PU+IP

Naša oznaka

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Qg [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1500	160	0,75	21	740	430	2910	286
3	1200	2200	200	0,75	31	740	585	3530	345
4	1700	3000	250	1,1	42	740	740	3840	422
6	2800	5000	280	1,5	70	1050	740	3840	525
9	4800	8400	355	3	118	1050	1050	4460	708
12	6600	11700	400	4	164	1360	1050	4460	855
16	8700	15200	450	5,5	213	1360	1360	5080	1099
20	11100	19500	560	7,5	274	1670	1360	5390	1359
25	14400	25300	630	7,5	355	1670	1670	5700	1703
30	17500	30700	710	11	430	1980	1670	5700	1953
36	20900	36600	800	11	514	1980	1980	6320	2385
48	28600	50100	900	15	703	2600	1980	6320	2932
64	38700	67700	1000	22	950	2600	2600	7250	3793
80	49000	85000	1000	30	1300	3220	2600	7250	4596