




## Tipsko rešenje klima komore

### 1.4.4.

Klima komora za grejanje, hlađenje i ventilaciju sa mešnom sekcijom sa dva regulaciona dempera, grubim filterom, toplovodnim grejačem, hladnjakom i potisnim ventilatorom

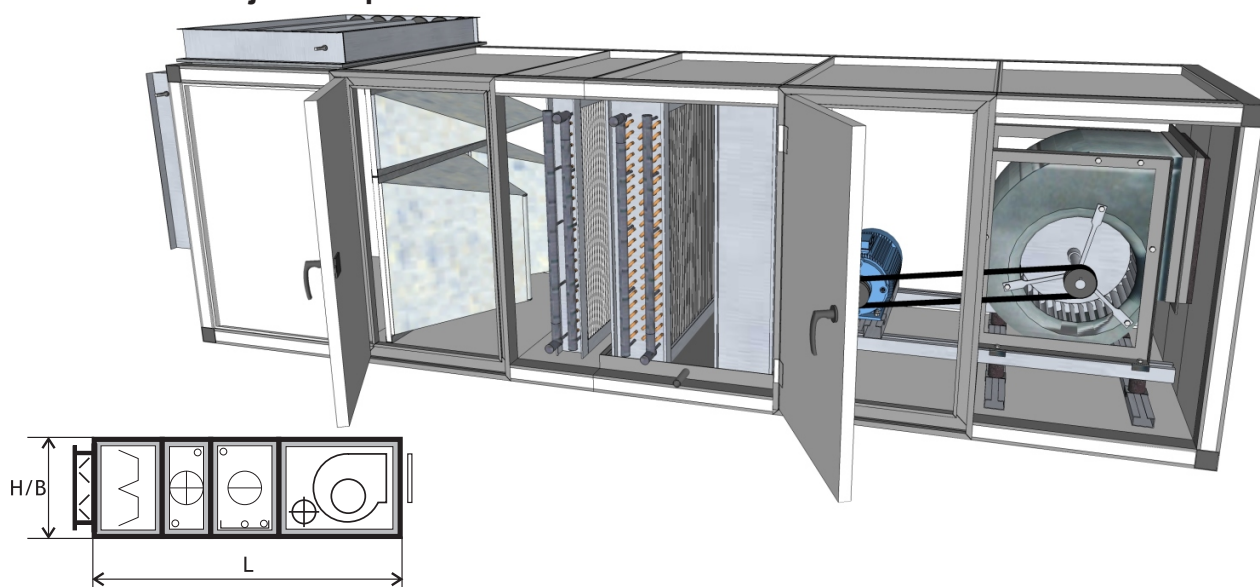

DR+FB+GB+HV+VU

**Naša oznaka**

Vel. kl. k.	Vmin [m <sup>3</sup> /h]	Vmax [m <sup>3</sup> /h]	Vel. vent.	Pmu [KW]	Qg [KW]	Qh [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,55	17	7	740	430	1980	229
3	1200	1800	200	0,75	25	11	740	585	2290	260
4	1700	2400	250	1,1	34	14	740	740	2600	327
6	2800	4000	280	1,5	56	24	1050	740	2600	408
9	4800	6700	355	3	94	40	1050	1050	5510	539
12	6600	9300	400	4	130	55	1360	1050	5510	664
16	8700	12100	450	5,5	170	72	1360	1360	3220	858
20	11100	15600	560	5,5	219	93	1670	1360	3220	1040
25	14400	20200	630	7,5	283	120	1670	1670	3530	1337
30	17500	24500	710	11	344	146	1980	1670	3530	1550
36	20900	29300	800	11	411	174	1980	1980	3840	1913
48	28600	40100	900	15	563	238	2600	1980	3840	2374
64	38700	54200	1000	18,5	760	322	2600	2600	4150	3017
80	49000	68600	1000	22	962	407	3220	2600	4150	3719