



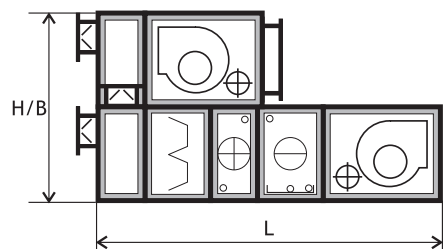

Tipsko rešenje klima komore

3.2.3. Klima komora za ubacivanje i izvlačenje vazduha, spratna, sa odsisnim ventilatorom, mešnom sekcijom sa tri regulaciona dempera, grubim filterom, toplovodnim grejačem, hladnjakom i potisnim ventilatorom

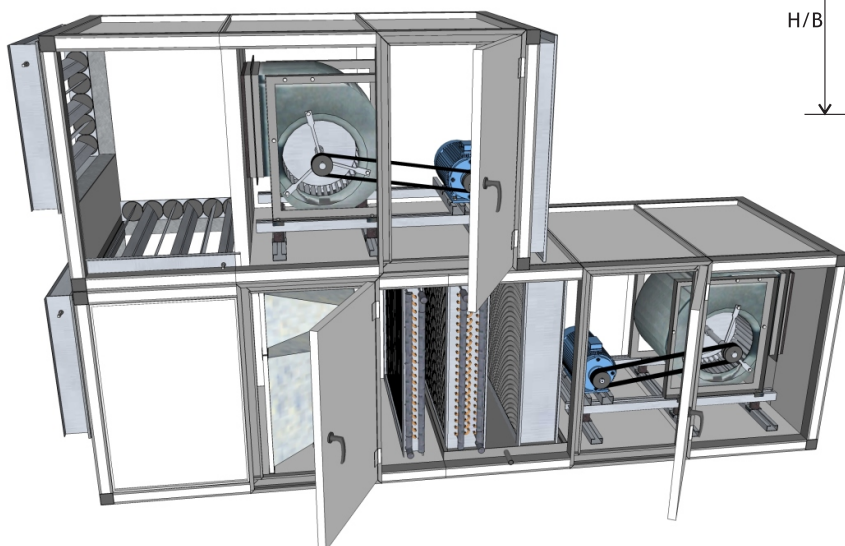

**UP+VO+M1+
 M2+FB+GB+HV+VU**
Naša oznaka

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1500	160	0,75	0,55	21	7	740	860	1980	383
3	1200	2200	200	0,75	0,75	31	11	740	1170	2290	429
4	1700	3000	250	1,1	1,1	42	14	740	1480	2600	547
6	2800	5000	280	1,5	1,5	70	24	1050	1480	2600	681
9	4800	8400	355	3	2,2	118	40	1050	2100	5510	954
12	6600	11700	400	4	4	164	55	1360	2100	5510	1165
16	8700	15200	450	5,5	5,5	213	72	1360	2720	3220	1494
20	11100	19500	560	7,5	5,5	274	93	1670	2720	3220	1881
25	14400	25300	630	7,5	7,5	355	120	1670	3340	3530	2404
30	17500	30700	710	11	7,5	430	146	1980	3340	3530	2774
36	20900	36600	800	11	11	514	174	1980	3960	3840	3512
48	28600	50100	900	15	15	703	238	2600	3960	3840	4339
64	38700	67700	1000	22	18,5	950	322	2600	5200	4150	5595
80	49000	85000	1000	30	30	1300	407	3220	5200	4150	6832