




Tipsko rešenje klima komore


3.4.5.

Klima komora za uštedu energije sa prigušivačima buke, grubim filterima, odsisnim ventilatorom, mešnom sekcijom, pločastim rekuperatorom toplote tipa vazduh-vazduh, toplovodnim grejačem, hladnjakom, potisnim ventilatorom i finim filterom

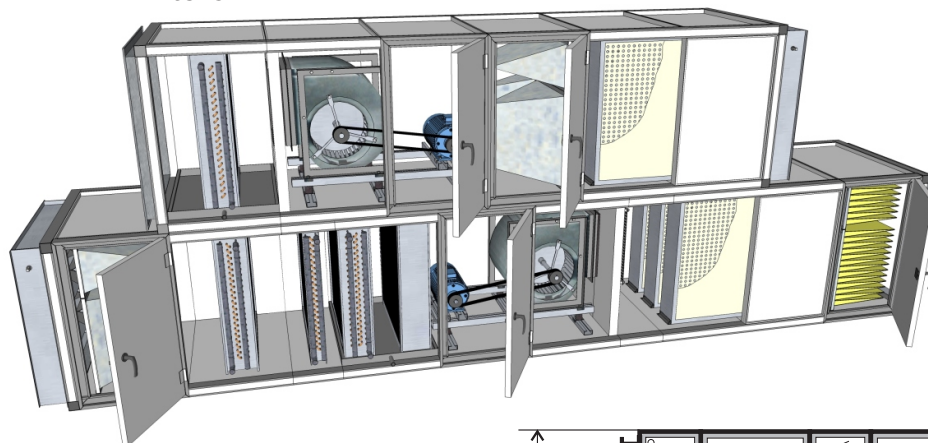

DR+PO+FB+VO+RH+IP+
DR+FB+RG+GB+HV+VU+DI+PU+FC+IP

Naša oznaka

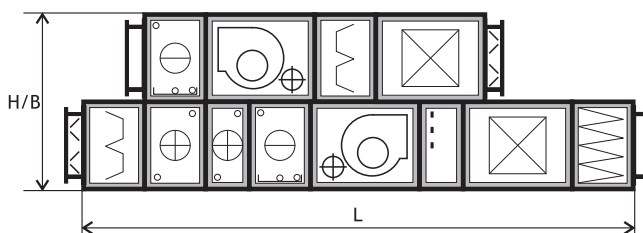

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	Qrg [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,75	0,55	13	7	4	740	860	4150	758
3	1200	1800	200	1,1	0,75	18	11	7	740	1170	4770	901
4	1700	2400	250	1,5	1,1	24	14	10	740	1480	5080	1083
6	2800	4000	280	2,2	1,5	39	24	17	1050	1480	5080	1369
9	4800	6700	355	3	2,2	66	40	28	1050	2100	5390	1767
12	6600	9300	400	4	3	90	55	40	1360	2100	5390	2181
16	8700	12100	450	5,5	4	119	72	51	1360	2720	6010	2778
20	11100	15600	560	7,5	5,5	152	93	67	1670	2720	6010	3334
25	14400	20200	630	11	7,5	197	120	86	1670	3340	6320	4213
30	17500	24500	710	11	7,5	241	146	103	1980	3340	6320	4883
36	20900	29300	800	15	11	290	174	121	1980	3960	6630	5880
48	28600	40100	900	18,5	15	395	238	168	2600	3960	6630	7370
64	38700	54200	1000	22	18,5	546	322	214	2600	5200	7250	9323
80	49000	68600	1000	30	22	668	407	294	3220	5200	7250	11429