



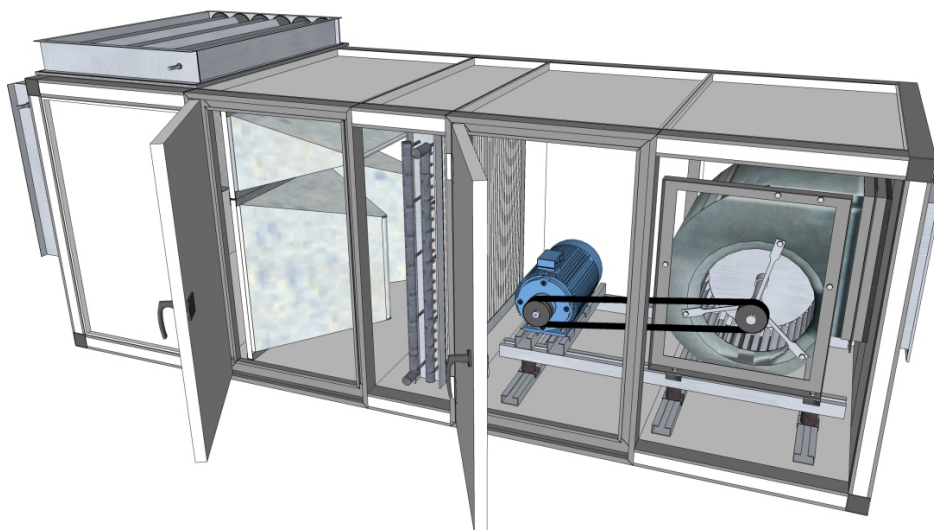

Tipsko rešenje klima komore

1.2.4. Klima komora za grejanje i ventilaciju sa mešnom sekcijom sa dva regulaciona dempera, grubim filterom, toplovodnim grejačem i potisnim ventilatorom.

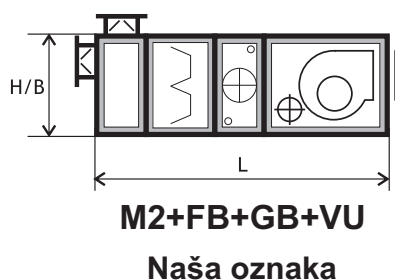

Vel. kl. k.	Vmin [m ³ /h]	Vmax [m ³ /h]	Vel. vent.	Pmu [KW]	Qg [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1500	160	0,75	21	740	430	1670	185
3	1200	2200	200	0,75	31	740	585	1980	209
4	1700	3000	250	1,1	42	740	740	2290	268
6	2800	5000	280	1,5	70	1050	740	2290	330
9	4800	8400	355	3	118	1050	1050	2910	464
12	6600	11700	400	4	164	1360	1050	2910	560
16	8700	15200	450	5,5	213	1360	1360	3220	716
20	11100	19500	560	7,5	274	1670	1360	3530	907
25	14400	25300	630	7,5	355	1670	1670	3840	1155
30	17500	30700	710	11	430	1980	1670	3840	1326
36	20900	36600	800	11	514	1980	1980	4460	1676
48	28600	50100	900	15	703	2600	1980	4460	2050
64	38700	67700	1000	22	950	2600	2600	5080	2649
80	49000	85000	1000	30	1300	3220	2600	5080	3225