



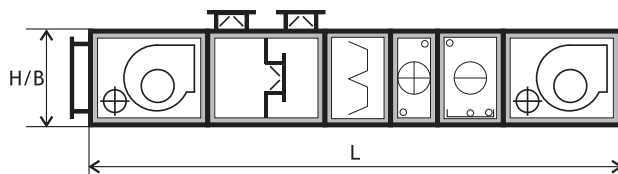

Tipsko rešenje klima komore

3.1.3.

Klima komora za ubacivanje i izvlačenje vazduha sa odsisnim ventilatorom, mešnom sekcijom sa tri regulaciona dempera, grubim filterom, toplovodnim grejačem, hladnjakom i potisnim ventilatorom

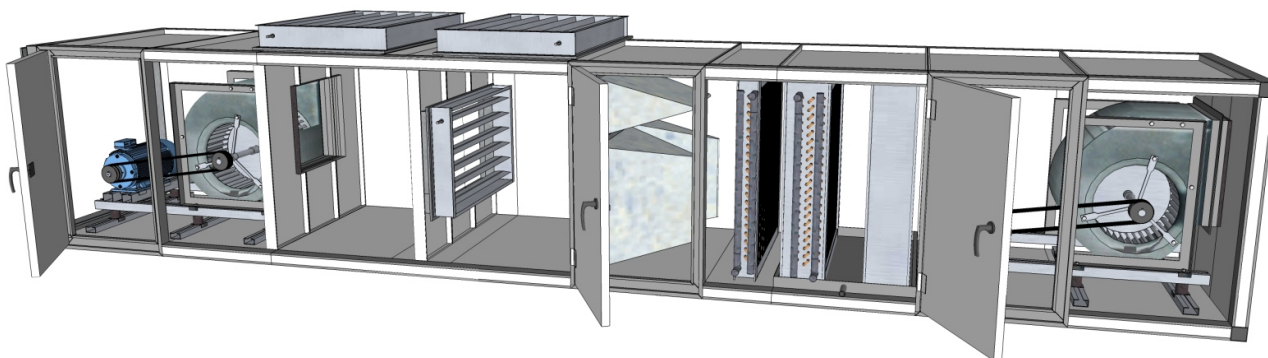

UP+VO+M3+FB+GB+HV+VU

Naša oznaka

Vel. kl. k.	Vmin [m³/h]	Vmax [m³/h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,55	0,37	17	7	740	430	3530	370
3	1200	1800	200	0,75	0,55	25	11	740	585	3840	414
4	1700	2400	250	1,1	0,55	34	14	740	740	4460	531
6	2800	4000	280	1,5	1,1	56	24	1050	740	4460	656
9	4800	6700	355	3	1,5	94	40	1050	1050	5700	922
12	6600	9300	400	4	2,2	130	55	1360	1050	5700	1125
16	8700	12100	450	5,5	3	170	72	1360	1360	6320	1441
20	11100	15600	560	5,5	4	219	93	1670	1360	6940	1821
25	14400	20200	630	7,5	5,5	283	120	1670	1670	7560	2329
30	17500	24500	710	11	5,5	344	146	1980	1670	7560	2685
36	20900	29300	800	11	7,5	411	174	1980	1980	8800	3411
48	28600	40100	900	15	11	563	238	2600	1980	8800	4196
64	38700	54200	1000	18,5	11	760	322	2600	2600	10040	5392
80	49000	68600	1000	22	18,5	962	407	3220	2600	10040	6579