



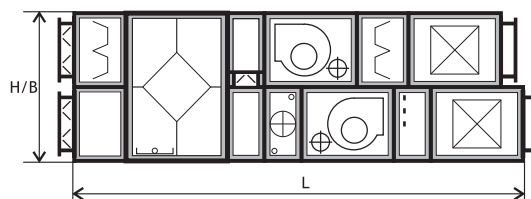

## Tipsko rešenje klima komore

### 3.3.2.2. Klima komora za uštedu energije sa prigušivačima buke, grubim filterima, odsisnim ventilatorom, mešnom sekcijom, pločastim rekuperatorom toplote tipa vazduh-vazduh, toplovodnim grejačem i potisnim ventilatorom

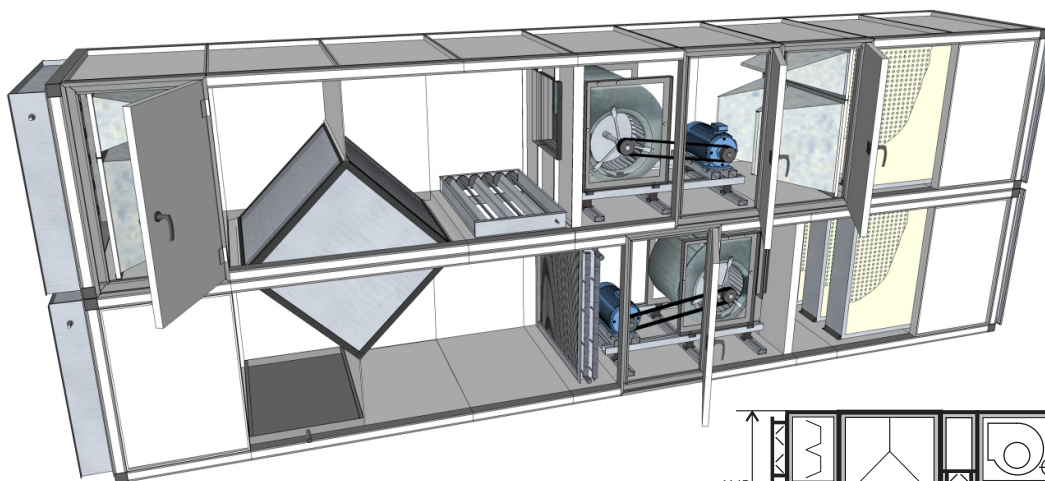

**UP+PO+FB+VO+M1+RP+IS+DR+  
 DR+FB+RP+M1+GB+VU+DI+PU+IP**

**Naša oznaka**

Vel. kl. k.	Vmin [m <sup>3</sup> /h]	Vmax [m <sup>3</sup> /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qh [KW]	Qrp [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1500	160	1,1	0,55	10	7	7	740	860	3530	559
3	1200	2200	200	1,1	0,75	15	11	10	740	1170	4150	667
4	1700	3000	250	1,5	1,1	20	14	14	740	1480	4460	820
6	2800	5000	280	2,2	1,5	30	24	26	1050	1480	4770	1072
9	4800	8400	355	4	2,2	48	40	46	1050	2100	5390	1431
12	6600	11700	400	5,5	3	71	55	59	1360	2100	5390	1744
16	8700	15200	450	7,5	4	92	72	78	1360	2720	6320	2290
20	11100	19500	560	11	5,5	119	93	100	1670	2720	6630	2801
25	14400	25300	630	11	7,5	151	120	132	1670	3340	7250	3596
30	17500	30700	710	15	7,5	184	146	160	1980	3340	7250	4105
36	20900	36600	800	15	11	214	174	197	1980	3960	8180	5099
48	28600	50100	900	22	15	293	238	270	2600	3960	8180	6247
64	38700	67700	1000	30	18,5	396	322	364	2600	5200	9730	8421
80	49000	85000	1000	37	22	442	407	520	3220	5200	10350	10967