




## Tipsko rešenje klima komore


### 3.4.2.

Klima komora za uštedu energije sa prigušivačima buke, grubim filterima, odsisnim ventilatorom, rekuperatorom toplote tipa vazduh-voda/glikol, toplovodnim grejačem i potisnim ventilatorom

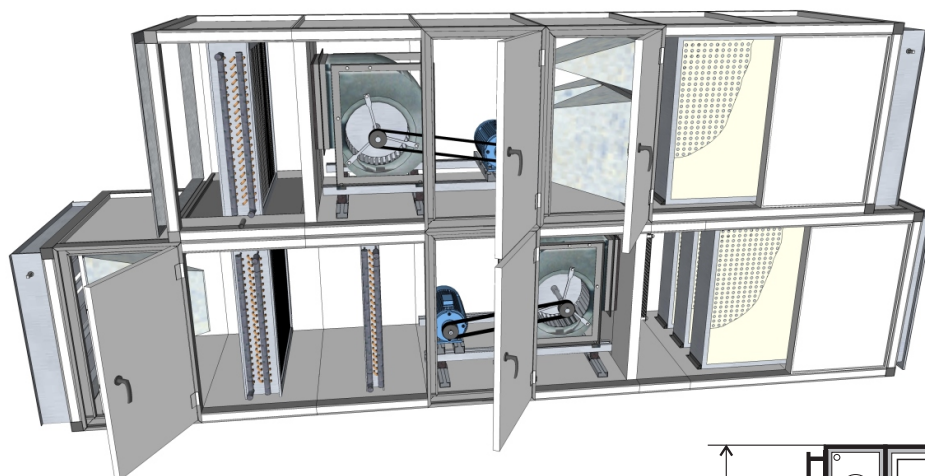

**DR+PO+FB+VO+RH+IP+  
DR+FB+RG+GB+VU+DI+PU+IP**

Naša oznaka

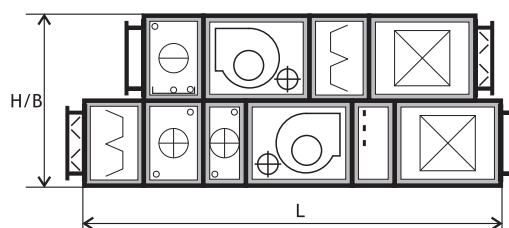

Vel. kl. k.	Vmin [m <sup>3</sup> /h]	Vmax [m <sup>3</sup> /h]	Vel. vent.	Pmu [KW]	Pmo [KW]	Qg [KW]	Qrg [KW]	B [mm]	H [mm]	L [mm]	G [Kg]
2	800	1200	160	0,75	0,55	13	4	740	860	2910	606
3	1200	1800	200	1,1	0,75	18	7	740	1170	3530	733
4	1700	2400	250	1,5	1,1	24	10	740	1480	3840	895
6	2800	4000	280	2,2	1,5	39	17	1050	1480	3840	1127
9	4800	6700	355	3	2,2	66	28	1050	2100	4150	1465
12	6600	9300	400	4	3	90	40	1360	2100	4150	1801
16	8700	12100	450	5,5	4	119	51	1360	2720	4770	2308
20	11100	15600	560	7,5	5,5	152	67	1670	2720	4770	2770
25	14400	20200	630	11	7,5	197	86	1670	3340	5080	3521
30	17500	24500	710	11	7,5	241	103	1980	3340	5080	4079
36	20900	29300	800	15	11	290	121	1980	3960	5390	4936
48	28600	40100	900	18,5	15	395	168	2600	3960	5390	6152
64	38700	54200	1000	22	18,5	546	214	2600	5200	6010	7805
80	49000	68600	1000	30	22	668	294	3220	5200	6010	9581